
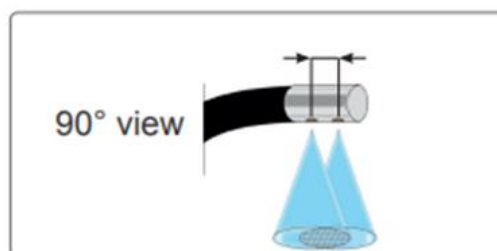
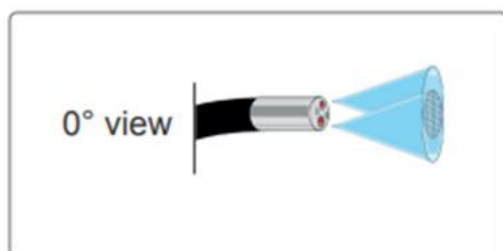




iX3D

Flexible Scope Measurement System

Professional 2D and 3D measurement
3D point cloud
Extremely easy to use
Result in less than 1 minute



Efficient borescope with stereo vision

iX3D is a precise and modular working videoendoscope system for the execution of 2D and 3D surface inspection and measurement functionality in hard-to-reach areas.

The system offers 2 light weighted probes (0° forward view + 90° side view), each equipped with a stereo vision camera system generating 3D data. The simple and user-friendly **interface and measurement software is intuitive.**

The monitor unit can be positioned independently of the probe. The probes have a very low weight. Both allow **almost unlimited use in any environment.**



Easy and fast usage with iX3D software

- Intuitive usage. No complex training/instructions/manual necessary
- Only several clicks/settings for measurement result in less than 1 minute

- Inspection mode without measurement functionality
- Measurement mode with necessary measurement functions

High measuring accuracy

- Magnifier for setting measurement points
- 360° 3D model view (incl. zoom in/off of model)/colored 3D depth map
- Both show in detail how measurement points are set

Flexible monitor unit

- The monitor unit (10" display with touch functionality) **can be placed and used independently of the handheld probe** and in any location.
- Robust rugged tablet PC for industrial use with a ultra bright durable display.
- 10.1 inch touch screen for optimal visual inspection, can be operated with gloves
- Good performance in direct sun light due to the bright display.



Software Features

- Modern and intuitive user interface in the style of a smartphone app.
- Enhance and filter camera images (e.g. brighten, sharpen, contrast adjustment, invert colors).
- Simple and extensive file management including quickly accessible display of the last recordings.



File management



- Can be stored in the internal file manager of the endoscope system
- Can be directly stored in a network drive of your company (endoscope + file drive have to be connected to same wireless LAN network)

Remote access and collaboration

- **Direct remote access to inspection and measurement** via additional/optional remote software (not included). Support team in your company can follow inspection/measurement on a live basis.

Measuring features and reporting


- Different measuring functions available:
 - Point to Point
 - Point to Line
 - Point to Plane
 - Multipoint
 - Max Point to Line
 - Plane
- Add comments, label and measurement results to stored images.
- Precise setting of the measuring points through availability of magnifier for the points
- Highlighting of the measurable range facilitates image evaluation.
- Colored 3D depth map and 360° 3D view

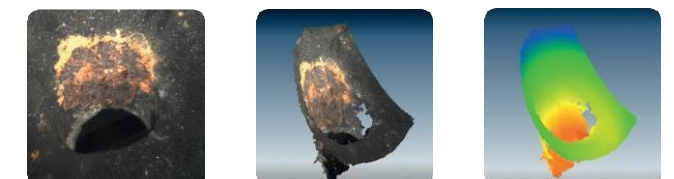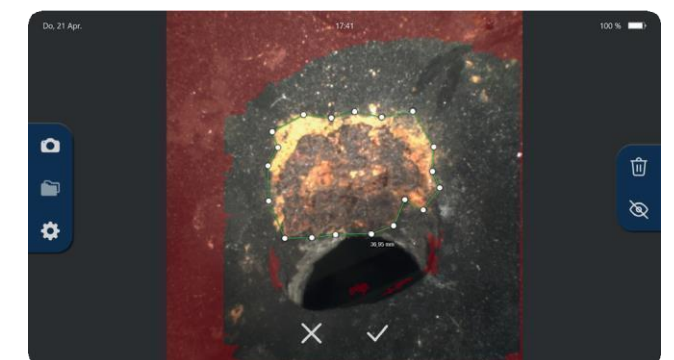

Easy and fast usage with iX3D software





A good reliable result in less than 1 minute.

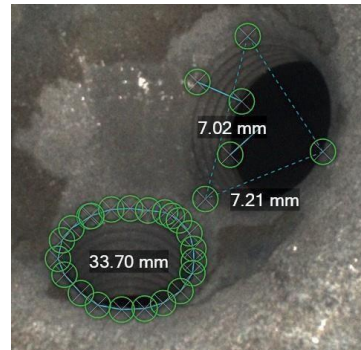

The usage of the software is so intuitive that you get fast results **without need for complex training/ instruction manuals** for the measurement. From the moment of starting the iX3D software you need **4 clicks for the camera settings** and **another 7 clicks to get your measurement result**.

Measurement in images

Images taken in measurement mode show areas (in red color) for which there are not enough 3D data for measurement available.

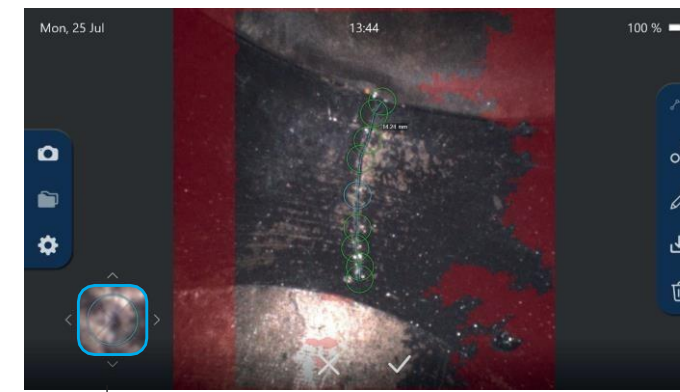

High reliability of measurement due to: Exact measurement point magnification





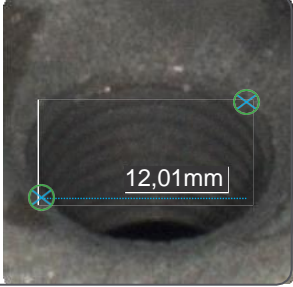
Image enhancement i.e., use "color inversion" for images with low contrast items

Different measurement types and control for honest results

1

point to point



- Set 2 measurement points.
- Result shows distance between both points in mm

2

point to line



- Set 2 points to define reference line
- Set 3. point as measurement point
- Result shows shortest distance between measurement point and reference line in mm

3

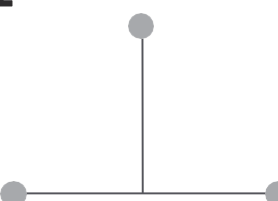point to Plane



- Set 3 points to define the reference Plane area
- Set 4. Point as measurement point
- Result shows shortest distance between measurement point and the middle of reference area

4

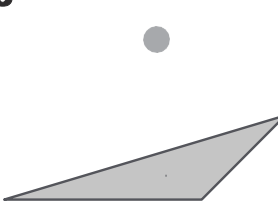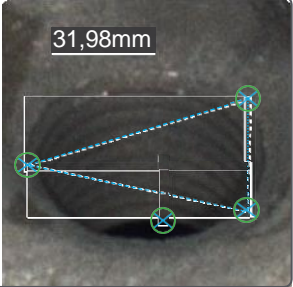Multi point



- Set points to define the multipoint line
- Result shows distance between all measurement

5

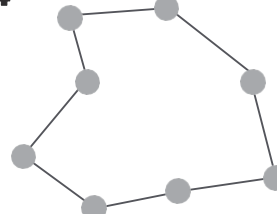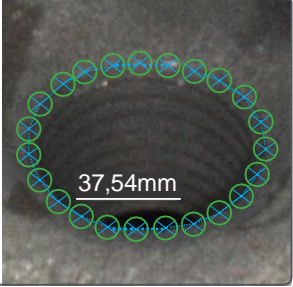Max point to line



- Set 2 points to define reference line
- Automatic display of maximum distance to line/profile (height/depth measurement)


6

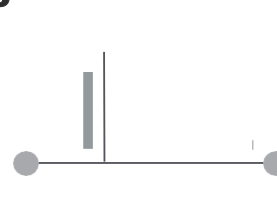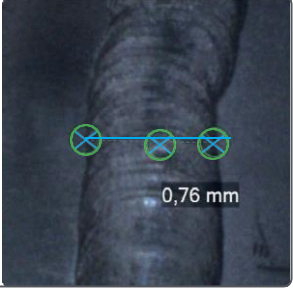plane


- Set points to define the multipoint line
- Result shows area calculation in the middle of the set marks

Measurement point control in 3D view

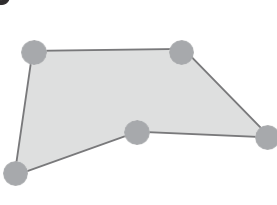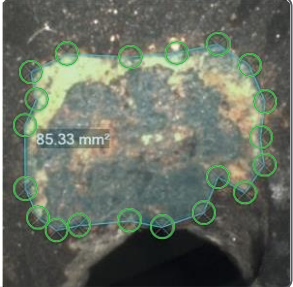


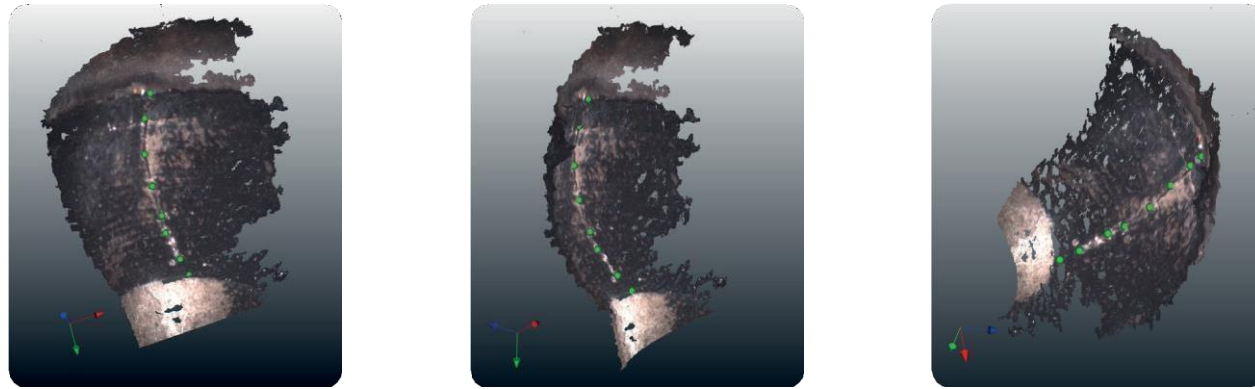360° 3D view of image and measurement points / Depth map display / zoom in/out for details

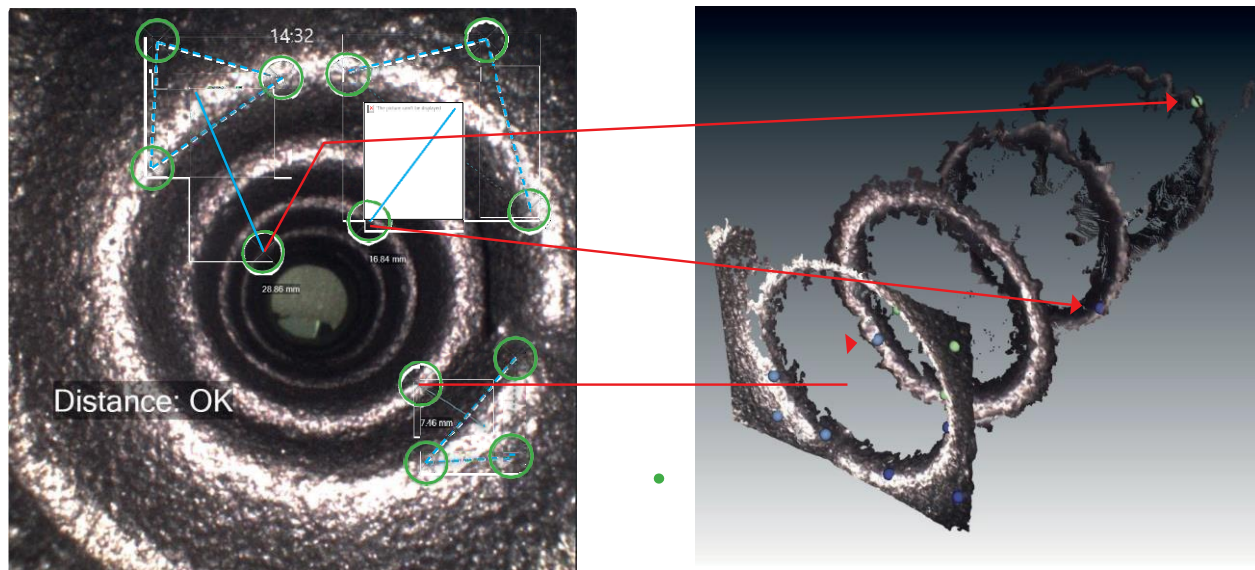


High resolution 3D- view of color image and measurements, making part inspection and measurement verification very easy.

Colored representation of the depth distances in the inspection area

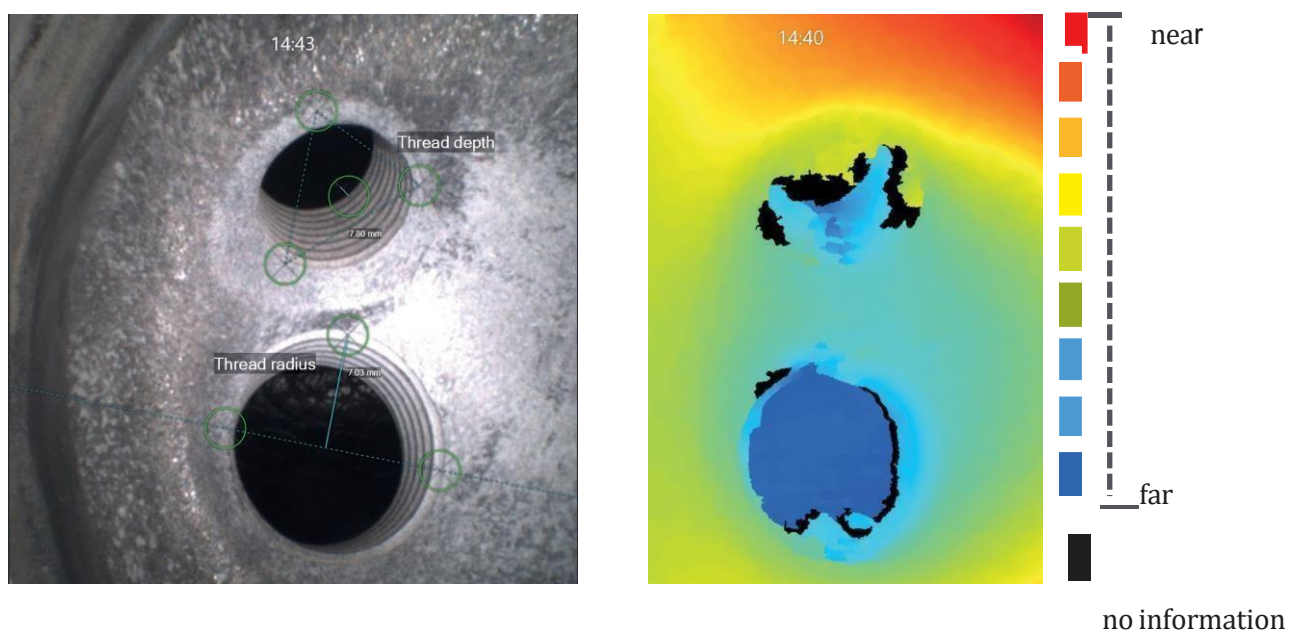

Color representation of depth - each layer shows a different color

Exchange Scopes in seconds

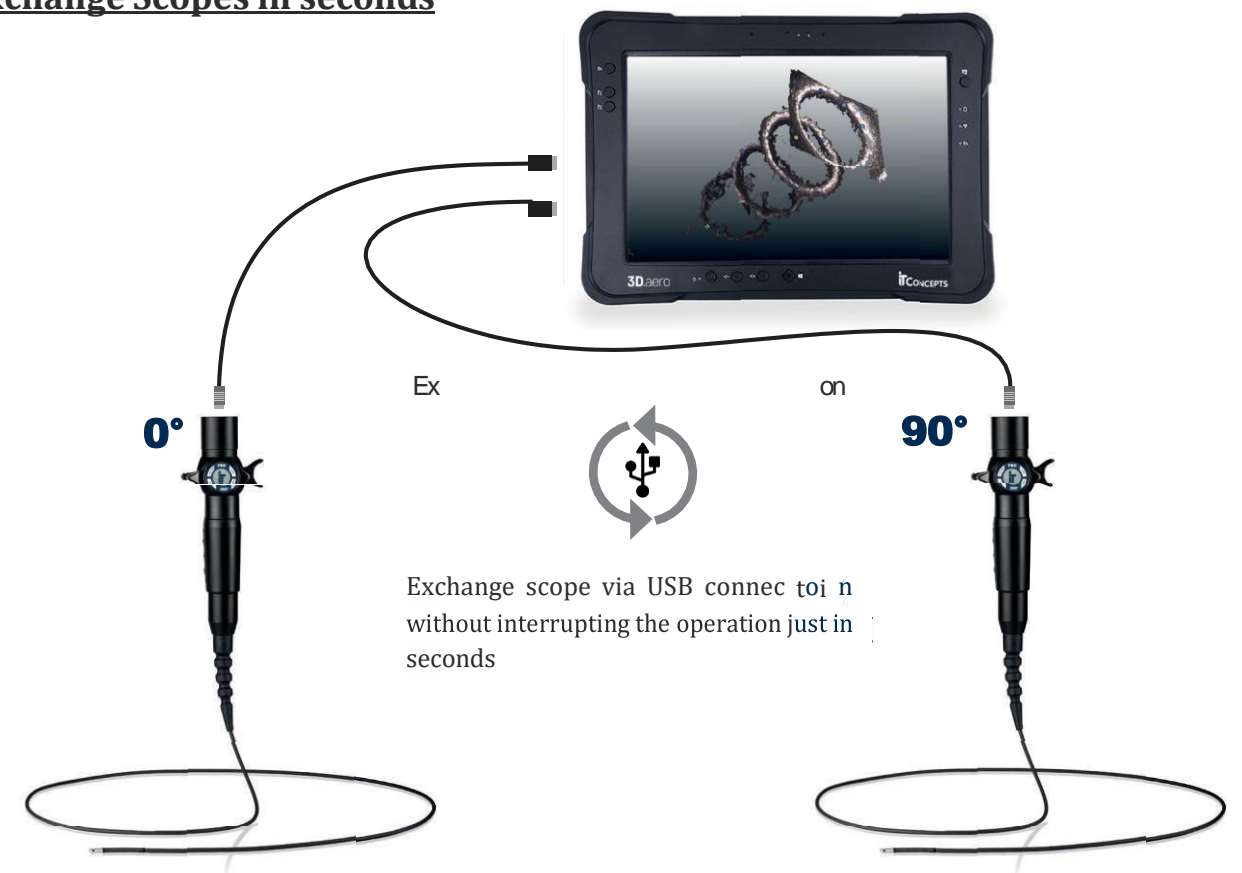

Exchange scope via USB connection without interrupting the operation just in seconds


Customer support by OEM/Sales Partners

- OEM/Sales Partners can offer customer support/training and direct remote access to the tablet PC via remote software (not included).

Delivery



PROBE AND PROBE CONTROL

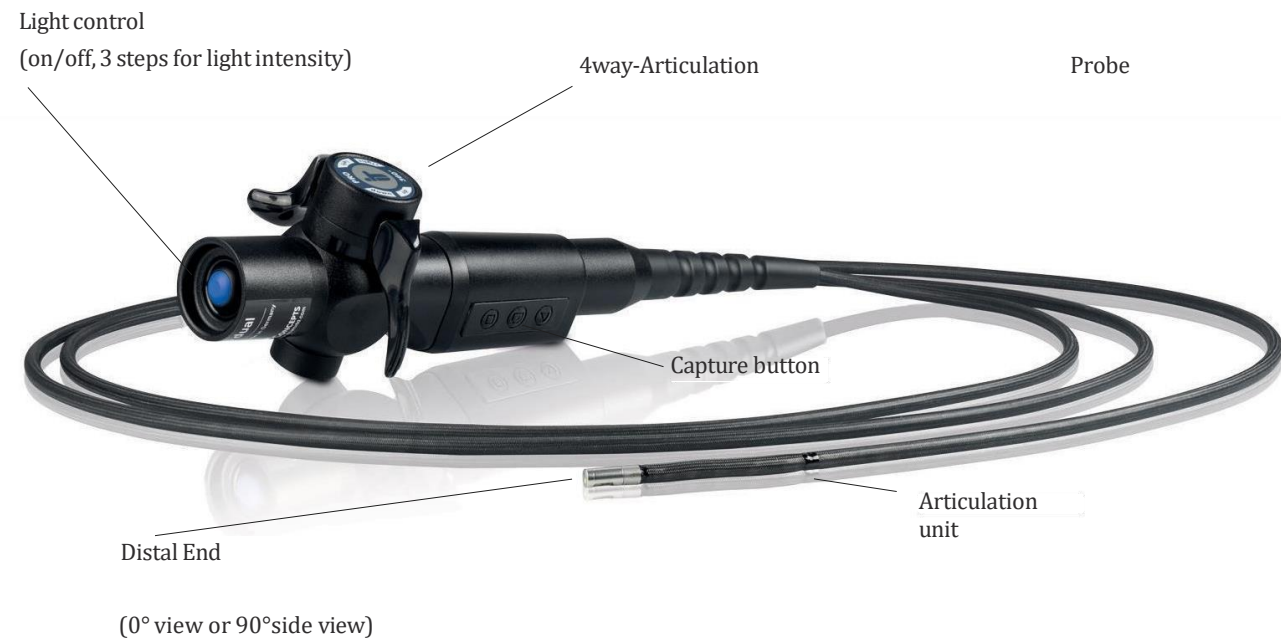

Technical Specification		
Probes	6.0mm	4.0mm
Working length	1.5 – 7.5 m	1.5 – 4.0 m
Direction of view	0° / 90°	0° / 90°
Field of View	90° / 120°	90°
Depth of Focus	5mm - ∞	5mm - ∞
Articulation:	4-way	4-way
Illumination		
Type:	High-power LED on the TIP	
Illumination control:	3 steps	
Weight:	1.65Kg (+/- de pence on probe diameter and working length)	
Tip operating temperature:	25°C to 100°C	
System operating Temp:	-25°C to +46°C	
Storage temperature:	-25°C to +60°C	
Relative humidity:	95% less than - non condensing	
Waterproof:	Probe and distal End up to 1 bar- 10.2m H2O	
Resistance:	Probe and distal End to oils and saline (5%)	
Sensor 0°	HD AIT Advanced Image Sensor (1MP)	
Sensor 90°	HD AIT Advanced Image Sensor (1MP)	

iX3D PAD (Tablet PC as monitor)



Processor	Intel® Core™ i5-7300U (2x 2.60 GHz up to 3.50 GHz with Intel® Turbo Boost Technology, HD 620, 3M cache)
Operating system	Windows® 10 Pro 64-bit
Optional operating system	Windows® 10 IoT
Display size	10.1" (25.65 cm)
Display Technology	Sunlight Readable Outdoor display with digitizer support
Resolution	1,920 x 1,200 pixels (WUXGA)
Brightness	1,000 cd/m ²
Screen protector	Corning® Gorilla® Glass
Touchscreen	Capacitive
Touch operation	Multi-touch
RAM (permanently soldered)	8 GB DDR3 SDRAM
Hard disk	128 GB SSD M.2
WLAN	IEEE 802.11a/b/g/n/ac
Interfaces	1x USB 3.1 Type-A™, 1x USB 3.1 Type-C™ (1.5A), 1x microHDMI, 1x LAN (1Gbps), 1x serial (RS232), 2x RF Pass-through port (for WLAN, GNSS, WWAN), Docking port
Camera front	2.0 megapixels
Rear camera	8.0 megapixels
Military standard	MIL-STD 461G, MIL-STD 810G
Degree of protection	IP 65
Battery	6-cell Li-ion battery, approx. 4,500 mAh (12-month guarantee)
Battery life up to	11 hours
Power supply	65 watts, external
Input:	100-240VAC / Output: 19V DC / 3.42A
Weight	1,360g
Dimensions (WxHxD)	280 x 195 x 23mm

iX3D Measurement software with PXL+ Technology




Basic Data

Version:	1.1.3.as of 30.01.2023
Category:	Endoscope 3D measurement software exclusively for endoscopeiX3Dof IT Concepts.
Germany	
Languages:	English, German, Italian, Russian, Spanish
Requirements:	Operating System Windows 10 Measurement functionalities included in iX3D-Software has to be calibrated by manufacturer after/with installation of iX3D-Software
Intellectual Properties:	3D.aero GmbH, Bill Horner Deich 96, D-20539 Hamburg, Germany (info@3d-aero.com)



Software features

Live camera	Current live view for visual inspection(not in measurement mode; for visual inspection purposes only)
File management	Set up of / naming of / moving up/down in file folder hierarchy(main and sub folders) Selection of files to be deleted Selection of folder in which new images should be stored automatically afterimage taking
Settings (permanently = until setting is changed manually)	Images/videos stored in file manager are visible as thumbnails Viewing single images in larger frame, start/stop video in larger frame Language preference(= English, German, Italian, Russian, Spanish) Freeze live view afterimage taking Set up of working folder/export folder location, file name (incl. date/time), Image/Video file name prefix/suffix
Exposure mode	Image enhancement of sharpness, brightness, contrast Invert colors
Inspection mode	Mirror image horizontal/vertical
Inspection camera	Exposure of camera (automatic/manual setting)
Inspection video	
Measurement mode	Measurement mode (off)
Measurement camera	Capture/save/delete images taken in inspection mode(2D) Start/stop video captured in measurement mode (2D)
Measurement video	Measurement mode (on), Stereo view of cameras(on = 2 images visible/off = 1 image visible)
Measurementmethods	Capture/save/delete images taken in measurement mode (3D) Result of measurement visible right after image taking (red color for areas without measurement result) Start/stop video captured in measurement mode (3D) Point-to-point, • point-to-line, • point-to-Plane (3D), • multipoint line Colored 3D point cloud as Depth map of measurement, 360° 3D view of model in image (3D; incl. different colors for each layer) All values in Millimeter (mm), save/delete images with/after measurement results
Measurement result	

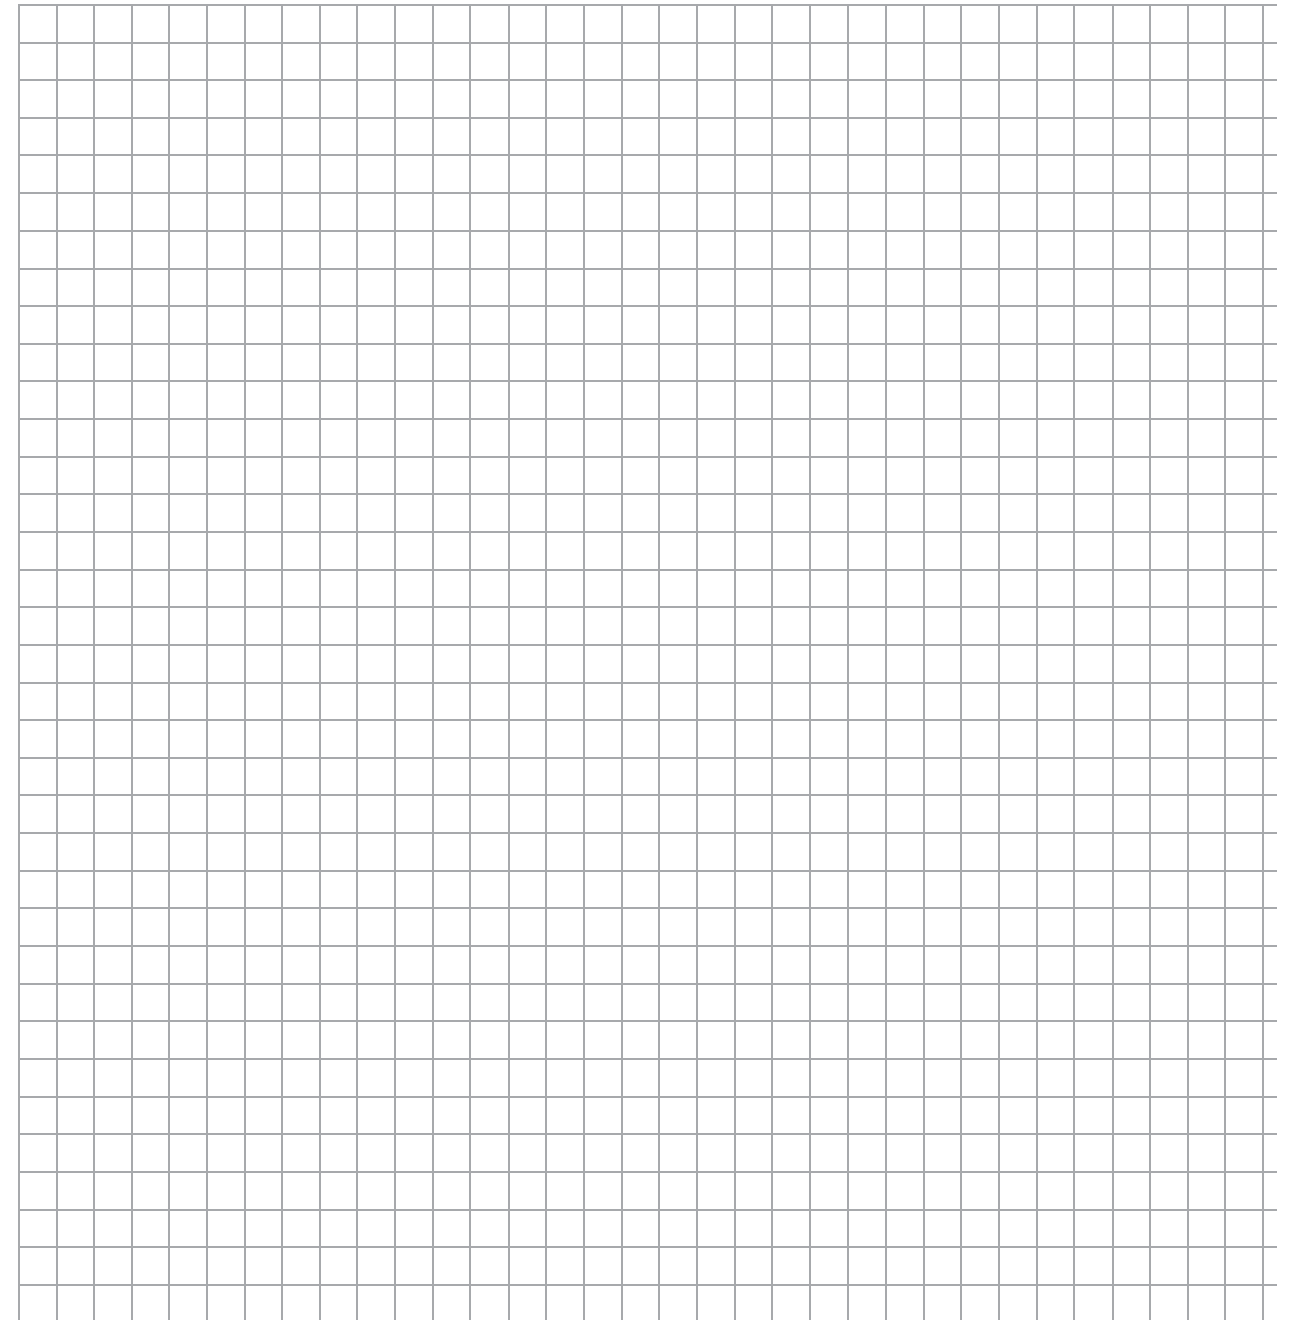

IT Concepts is a developer, manufacturer, and OEM- partner in industrial endoscopy and imaging technologies from prototype to serial production.
In cooperation with our customers, we develop the optimal solution for the specific application.

3D.aero develops advanced automation solutions for production and MRO in the aviation industry.
They support everything from the feasibility study to the development of a turnkey technological solution.

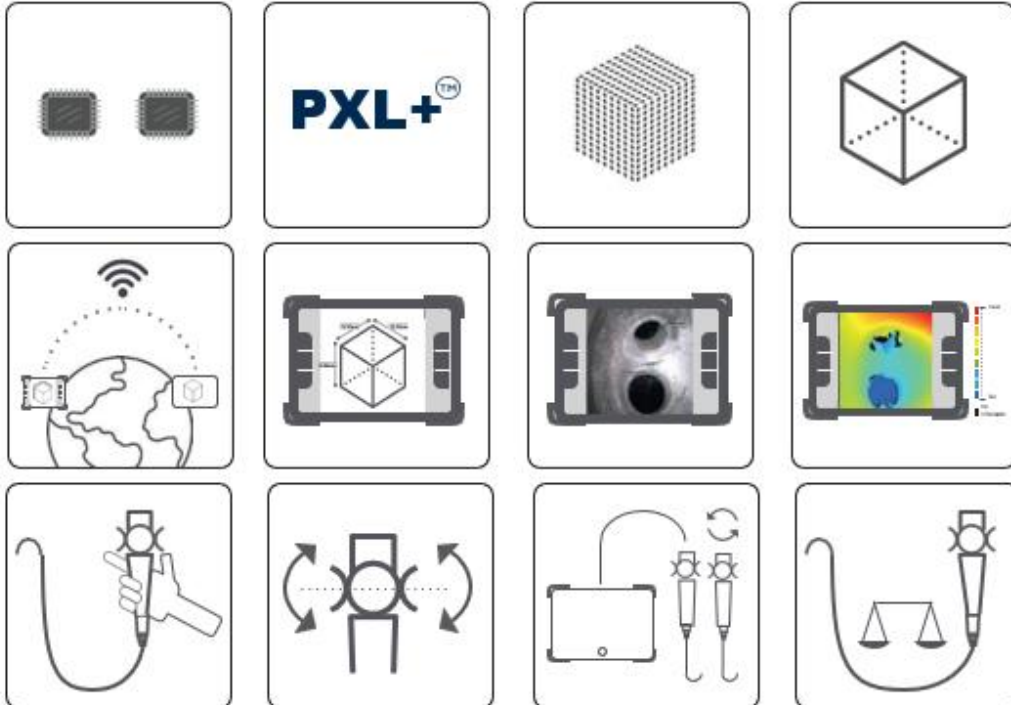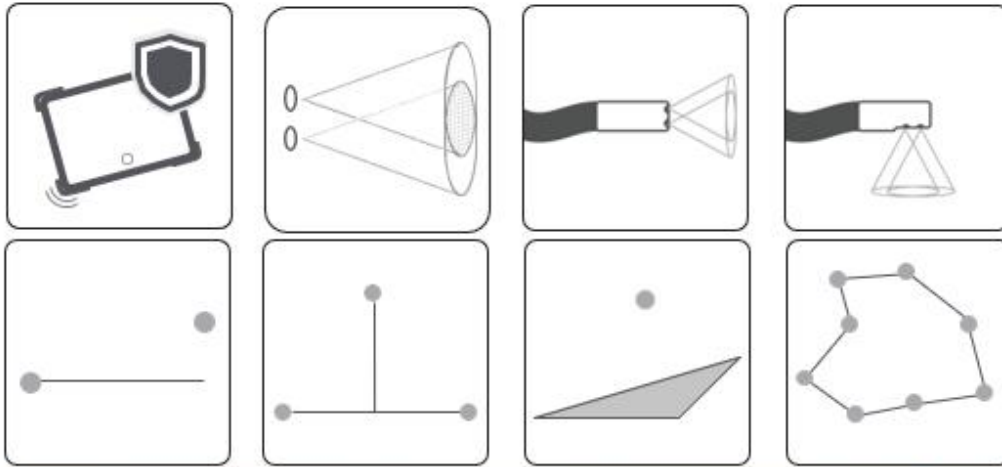

JSC IT Concepts India Pvt. Ltd. | New Delhi | India

IT Concepts LLC | 1244-B Quarry Lane | Pleasanton, CA 94566 | USA

IT Concepts GmbH | Gewerbestraße 17 | 35633 Lahnau | Germany

Intech | AO INTEK Prospect Metallistov 96 | 195221 Saint-Petersburg

IT Concepts APAC Pte Ltd | 11 Lorong 3 Toa Payoh | #01-13 Block B Jackson Square | Singapore 319579 | Singapore